


16 & 20 FT. WIDE • GROUND TO GROUND

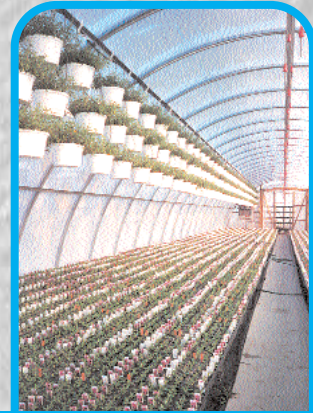

conleys.com

CF Series 1000 Ground to Ground

outstanding features

- Two-piece arch that laps and bolts together
- Simple to install
- Arches nest together for more efficient shipping
- Economically priced


Value

- Components supplied pre-cut and punched for an easy bolt together assembly. Step-by-step installation instructions are included
- With more headroom than most structures in its class, Conley's ground to ground cold frames provide ideal environments for growing.

Conley's CF Series 1000 represents one of the strongest ground to ground designs on the market today. These structures have been employed throughout the world in some of the harshest environments imaginable. ROLLFORMED arches and purlins help to set this house apart from other competitors. In addition to maximizing the strength characteristics of each metal member supplied, ROLLFORMED components "stack" in tight shipping bundles thereby reducing freight costs. This structure is designed specifically for poly or shade cloth coverings.



SPECIFICATIONS

CF SERIES 1000




Superior strength ROLL-FORM arch and purlin design maximizes strength.


Arch aluminum gable end bar combo & spring secures coverings to roof and end wall.



Wood for sidewall framing supplied by others.

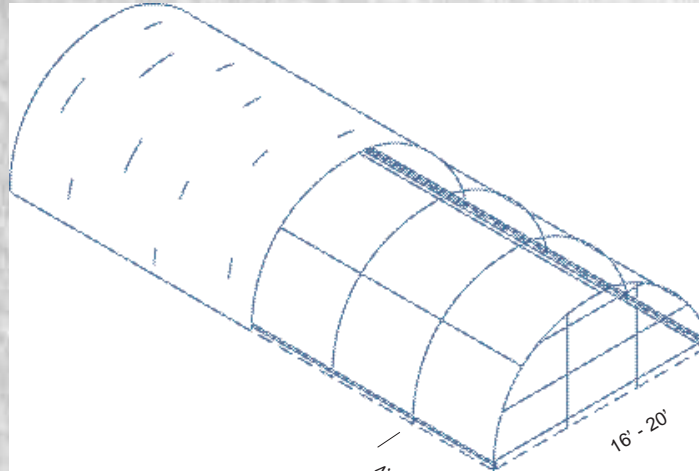

Aluminum base and spring lock secure poly to sides.





Conley's Cold Frame Structures represent non-code designs with certifications unavailable. Not recommended for regions of snow or high winds.

Accessories

description

- Arch Aluminum Gable End Bar with Springs & Screws
- Arch Aluminum Spring Lock & Screws
- Upgrade One 12' Long 3" Purlin to 5" Purlin
- Upgrade One 10' Long 3" Purlin to 5" Purlin
- 12' Straight Aluminum Spring Lock & Screws
- Galvanized Steel Endwall Frame with Two "C" Uprights and Three Runs Girts
- PolyCarbonate with Fasteners and Closure Strip for Endwalls
- Arch to Ground Anchor Tab with Two Screws
- 1/4" x 2" Carriage Bolts with 1/4" Nuts
- Extra 5" Girts 12' 4" Long (For Framing)
- 3' x 6'8" Storm Door Kit with Double Pane Glass

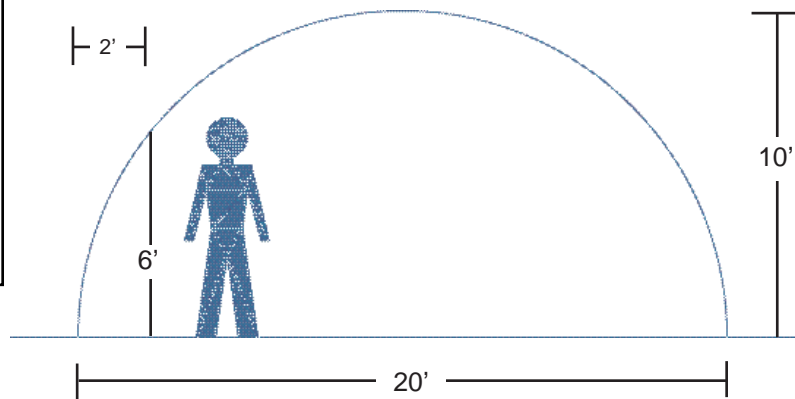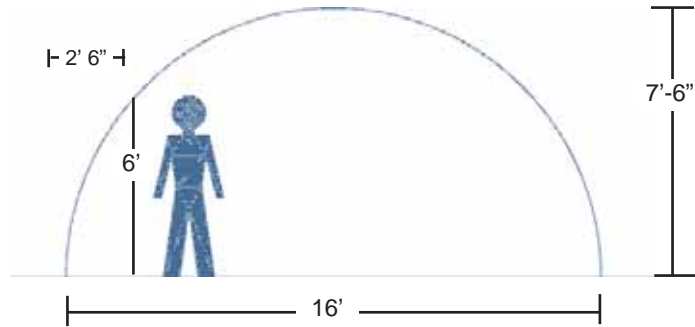

PRICES, WEIGHTS & SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.
 PRICES EXCLUDE INSTALLATION LABOR, OR FREIGHT
 (800) 377-8441 or (909) 627-0981 FAX (909) 628-3774